




Distributed by: America West Drilling Supply
800-800-8444 | 775-355-1199

7CH – 10,000 PSI RATED

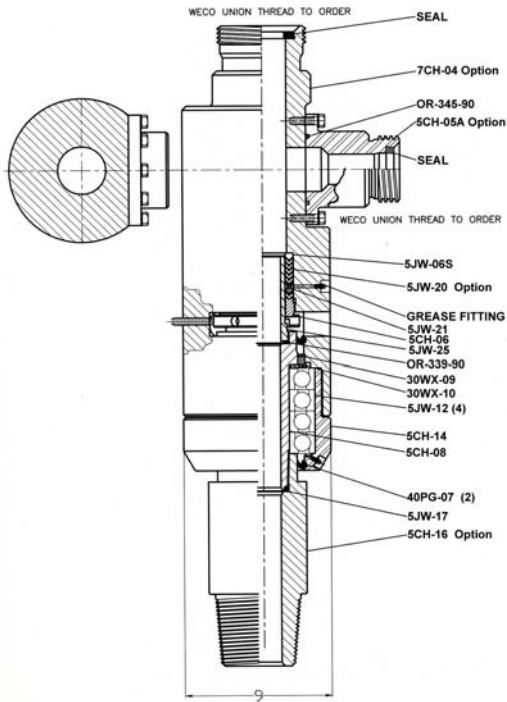

- Circulating head
- Alloy steel construction
- Angular contact ball bearing for ample pressure and radial load support
- Grease lubricated bearing
- Grease lubricated & adjustable Chevron packing
- Optional connections available

TECHNICAL

LENGTH	WIDTH	WEIGHT	UPPER CONN.	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
38	9	315#	WECO TYPE UNION	WECO TYPE UNION	4 1/2 IF RH PIN	2 7/8	TO 10,000 PSI

**WEIGHT CAPACITY
DESIGNED FOR PRESSURE LOAD ONLY**

PARTS LIST

PART NUMBER	NAME	QTY. REQ.	
7CH-6930-XX	WESTERN CIRCULATING HEAD, INTEGRAL FEMALE SUB UNIONS FOR TOP AND BOLT ON (FLANGED) FEMALE SUB HOSE CONNECTION WITH 4 1/2" IF RH PIN LOWER CONNECTION		
	ADD FOR 3 1/2" IF RH PIN LOWER CONNECTION		
7CH-04	GOOSENECK	OPTION	
5CH-05C	HOSE CONNECTION, 3" 1502 FEMALE SUB	OPTION	
5JW-06S	ADAPTER, PACKING (STEEL)	1	
5JW-07	SEAL HOUSING	2	
5CH-08	SPINDLE, BEARING	1	
30WX-09	SEAL, SHIELD	1	
30WX-10	SHIELD, BEARING	1	
5JW-12	BEARING	4	
5CH-06	GLAND, PACKING ADJUSTING	1	
5CH-14	HOUSING, BEARING	1	
5CH-16KE-RP	LOWER CONNECTION, 4 1/2" IF RH PIN	1	
5CH-16JE-RP	LOWER CONNECTION, 3 1/2" IF RH PIN	OPTION	
5JW-17	SEAL, SPINDLE THREAD	1	
5JW-20-847	PACKING SET (HIGH PRESSURE)	1	
5JW-20	PACKING SET	OPTION	
5JW-21	RING, LANTERN	1	
5JW-25	WASHPIPE	1	
OR-339-90	O RING (WASHPIPE)	1	
OR-345-90	O RING (HOSE CONNECTION)	1	
15WX-15	BOLT, HOUSING LOCK W/NUT	1	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

